


Simulation Results

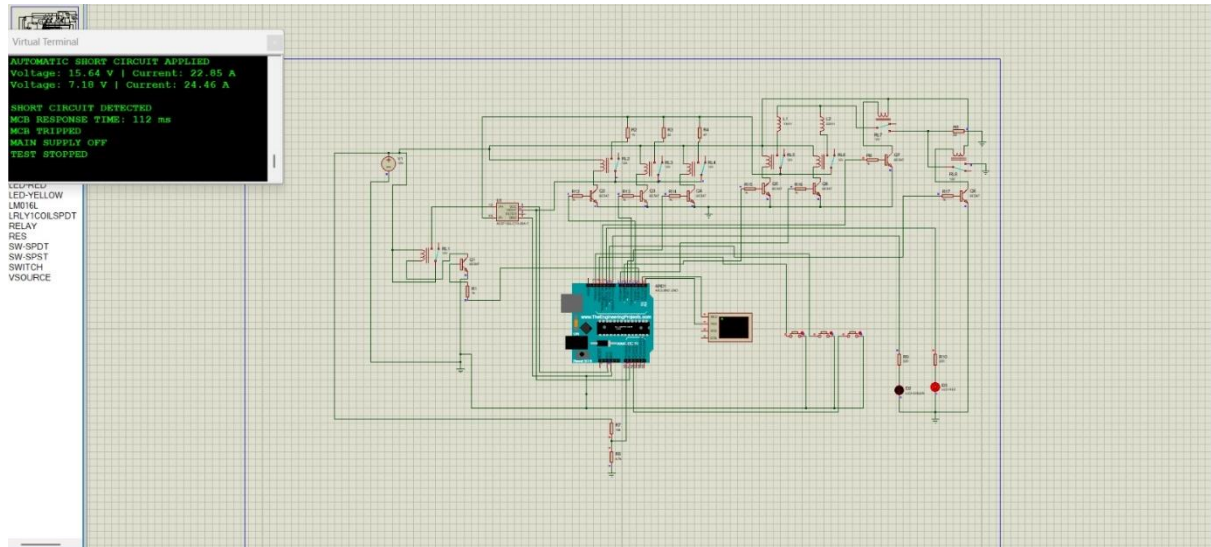

Virtual Terminal

```
AUTOMATIC SHORT CIRCUIT APPLIED  
Voltage: 15.64 V | Current: 22.85 A  
Voltage: 7.18 V | Current: 24.46 A  
  
SHORT CIRCUIT DETECTED  
MCB RESPONSE TIME: 112 ms  
MCB TRIPPED  
MAIN SUPPLY OFF  
TEST STOPPED
```

Virtual Terminal

```
AUTOMATED MCB TEST SYSTEM  
12 V PROTEUS DEMONSTRATION  
SYSTEM READY  
=====
```

TEST STARTED
MAIN SUPPLY ON
NORMAL LOAD APPLIED
SHORT CIRCUIT WILL BE APPLIED AUTOMATICA